

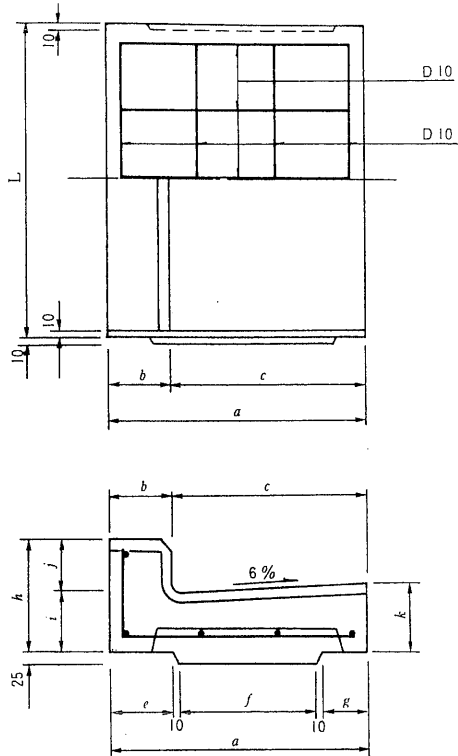
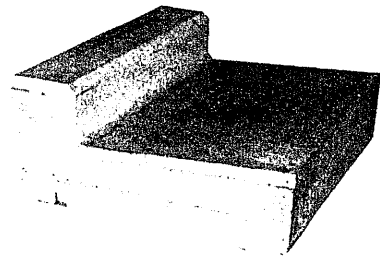


鉄筋コンクリートL U街渠L形

タイプ 1, 3, 5, 7

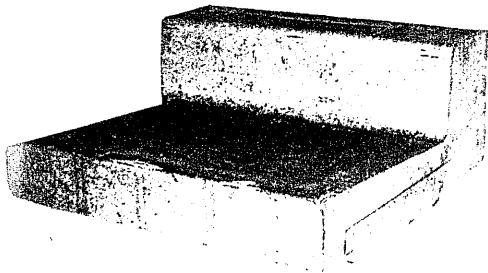


タイプ 4, 8

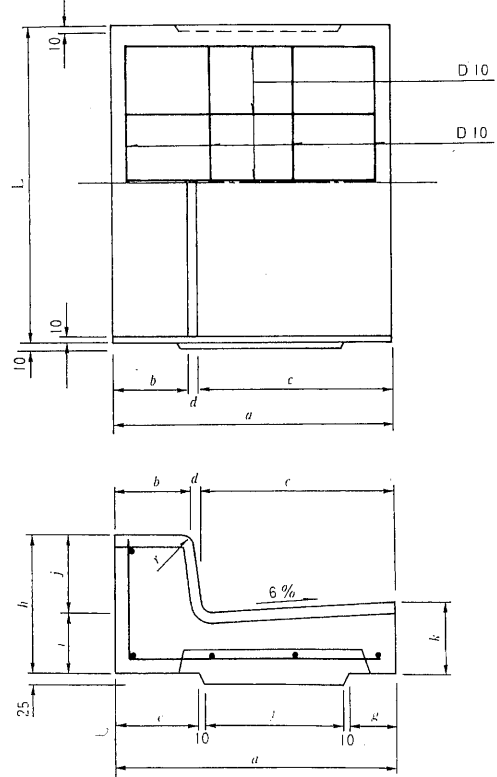

呼び名	寸法 (mm)													参考重量 (kg)
	a	b	c	d	e	f	g	h	i	j	k	r	L	
TYPE1-5 T-7	500	120	380	—	120	270	90	180	80	100	103	—	610	91
TYPE3-7 T-20	500	120	380	—	120	270	90	210	110	100	133	—	610	113
TYPE4-8 T-20	545	150	380	15	165	270	90	260	110	150	133	20	610	137

L 形側溝 1 種 JIS A 5372

L 形側溝 1 種

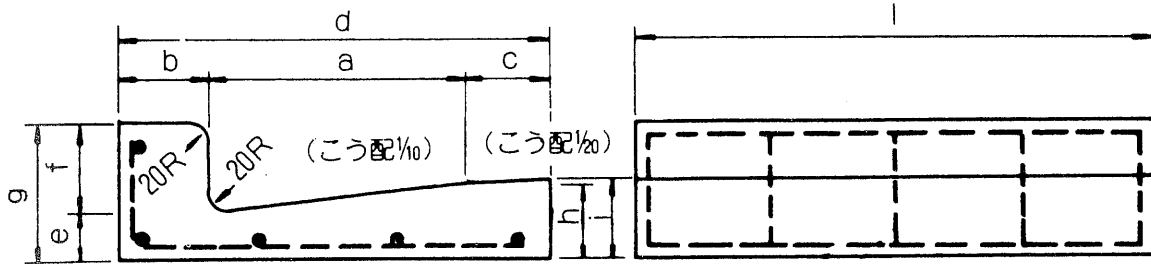

左

右

車 道

呼 び 名		記 号	寸 法 (mm)										鉄 筋				重 量 (kg)
			a	b	c	d	e	f	g	h	i	l	縦鉄筋		横鉄筋		
													径 (mm)	数量 (本)	径 (mm)	数量 (本)	
L 形側溝 1 種	250 A	RC 250	250	100	—	350	55	100	155	80	—	600	4.0	4	4.0	5	44
	250 B	RC 250	250	100	100	450	55	100	155	80	85	600	4.0	5	4.0	5	56
	250 D	RC 250	250	50	100	400	55	100	155	80	85	600	4.0	5	4.0	5	47
	250 E	RC 250	250	100	100	450	55	50	105	80	85	600	4.0	5	4.0	5	49
	250 E	RC 250	250	100	100	450	55	20	75	80	85	600	4.0	5	4.0	5	45
	300 B	RC 300	300	100	100	500	55	100	155	85	90	600	4.0	5	4.0	6	65
	300 D	RC 300	300	50	100	450	55	100	155	85	90	600	4.0	5	4.0	5	56
	300 E	RC 300	300	100	100	500	55	50	105	85	90	600	4.0	5	4.0	6	57
	300 E	RC 300	300	100	100	500	55	20	75	85	90	600	4.0	5	4.0	6	53
	300 DE	RC 300	300	50	100	450	55	50	105	85	90	600	4.0	5	4.0	6	52